



### Main applications

- Extrusion lines
- Rubber presses
- Test benches
- Food processing equipment
- Thermometry
- Hygrometry

### Main features

- Faceplate configurable input
- Protected by a personal code
- Configurable by a serial link
- Transmitter power supply incorporated
- Custom thermocouple linearisation available
- Internal linearisation for engineering units
- Labels provided for the most common physical units

### GENERAL

Microprocessor based indicator in both 48x48 (1/16 DIN) formats manufactured with SMT.

The instrument have a lexan membrane faceplate (guaranteed to IP65) which has 3 keys, a 4-digit display.

The input signal can be selected from a wide range of sensors:

- Thermocouples of type J, K, R, S, T, B, E, N, L GOST, U, G, D, C
- Resistance thermometers Pt100, JPt100, 2 / 3 wire
- PTC and NTC themistors
- Linear inputs 0 to 60/12 to 60mV, 0 to 20/4 to 20mA, 0 to 10/2 to 10/0 to 5/1 to 5/0 to 1/0, 2 to 1V

The selection is made using the faceplate keys and correct input contact.

No external shunt or adapter is required.

The programming of the instrument is made easy by grouping the parameters in function blocks and by a simplified data entry menu.

The configuration can be simplified even further using the PC programming

kit made up of a connection cable and a menu guide program that runs under windows (see data sheet WINSTRUM). A configurable personal software protection code (password protection) can be used to restrict the levels of editing and displaying the configuration parameters.

### TECHNICAL DATA

#### INPUTS

Accuracy 0,2% f.s.  $\pm 1$  digit.

Sampling time: 120msec for temperature sensors, configurable for linear inputs down to a minimum of 15msec with reduction of the resolution to 2000 steps.

Configurable decimal point position for linear inputs, for TC, RTD, PTC and NTC inputs, only one decimal digit is allowed in the maximum display range of -199.9 to 999.9 with indication of open circuit thermocouple or RTD, PTC or NTC in open or short circuit, indication of over- and under-range for linear inputs.

#### TC - Thermocouple

|        |                                |
|--------|--------------------------------|
| J      | 0 to 1000°C / 32 to 1832°F     |
| K      | 0 to 1300°C / 32 to 2372°F     |
| R      | 0 to 1750°C / 32 to 3182°F     |
| S      | 0 to 1750°C / 32 to 3182°F     |
| T      | -200 to 400°C / -328 to 752°F  |
| B      | 44 to 1800°C / 111 to 3272°F   |
| E      | -100 to 750°C / -148 to 1382°F |
| N      | 0 to 1300°C / 32 to 2372°F     |
| L-GOST | 0 to 600°C / 32 to 1112°F      |
| U      | -200 to 400°C / -328 to 752°F  |
| G      | 0 to 2300°C / 32 to 4172°F     |
| D      | 0 to 2300°C / 32 to 4172°F     |
| C      | 0 to 2300°C / 32 to 4172°F     |
| custom | -1999 to 9999                  |

**RTD (2 or 3 wire)**

PT100 -200 to 600°C / -328 to 1112°F  
JPT100 -200 to 600°C / -328 to 1112°F

**PTC**

990Ω, 25°C -55 to 120°C / -67 to 248°F

**NTC**

1KΩ, 25°C -10 to 70°C / 14 to 158°F

**DC - Linear**

With scale configurable within the limits:

-1999 to 9999

0 to 60mV / 12 to 60mV

0 to 10V / 2 to 10V

0 to 5V / 1 to 5V

0 to 1V / 0,2 to 1V

0 to 20mA / 4 to 20mA

Input impedance: for voltage signals

Ri > 1MΩ f.s. 60mV and 1V,

Ri > 10KΩ f.s. 5V and 10V.

For current signals Ri = 50Ω

32-segment configurable linearisation can be used.

**POWER SUPPLY**

Standard: 100 to 240Vac ± 10%

optional: 11 to 27Vac/dc ± 10%

50/60Hz, max. 5,5VA

Protected by an internal fuse (not replaceable by the operator).

**POWER SUPPLY****TRANSMITTER**

24V ±10% unstabilised, 50mA

15V for transmitter, 50mA

1,2V for potentiometer > 100Ω

**AMBIENT CONDITIONS**

**Working temperature range:** 0 to 50°C

**Storage temperature range:** -20 to 70°C

**Humidity:** 20 to 85%Ur non-condensing

**WEIGHT**

150g in the complete version

**FACEPLATE DESCRIPTION**

A - PV display: indication of process variable, 10mm high


Red LED display

B - Label for engineering units

C - "Function" key


D - "Raise" and "Lower" keys

E - key not used

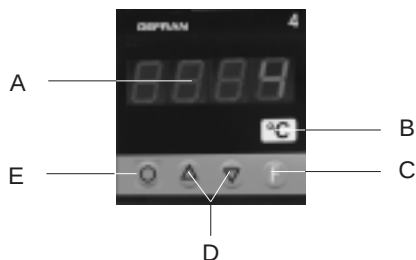


IP65 faceplate protection

## DIMENSIONS and CUT-OUT

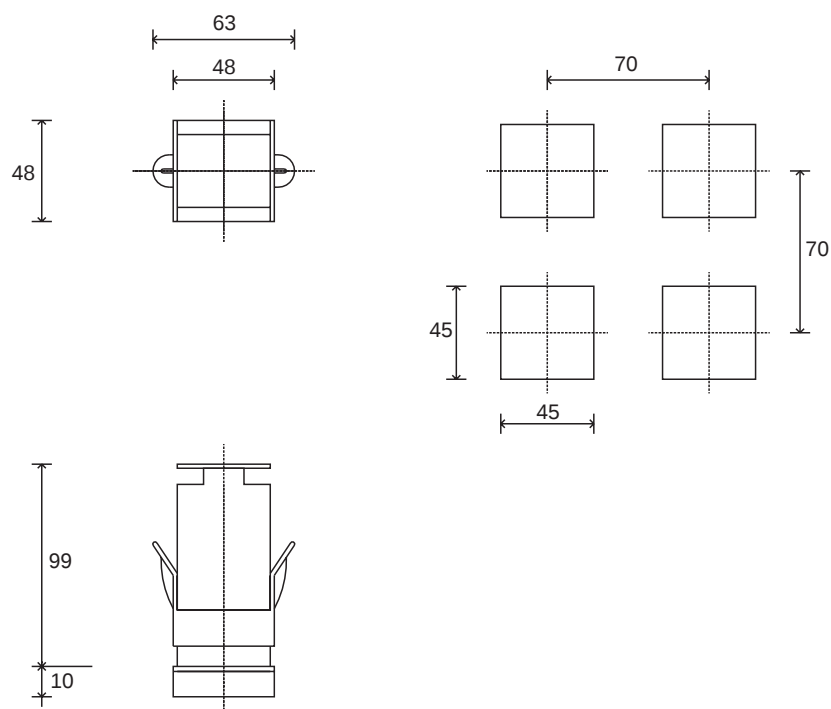

Dimensions: 48x48mm (1/16DIN) depth 99mm

## CONNECTION DIAGRAM

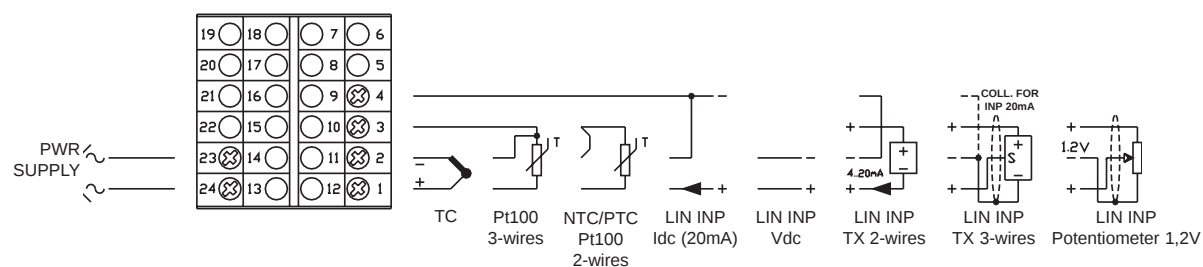

Apply user's manual warnings for a correct installation

## ORDER CODE

4T 48 4      

| NR. DIGITS |   |
|------------|---|
| 4          | 4 |

| POWER SUPPLY |                |
|--------------|----------------|
| 0            | 11 to 27Vac/dc |
| 1            | 100 to 240Vac  |

| TRANSMITTER POWER SUPPLY                   |                              |
|--------------------------------------------|------------------------------|
| 0 0                                        | None                         |
| For T input (alternative to RTD, PTC, NTC) |                              |
| 0 1                                        | 1,2Vdc for potentiometer (*) |
| 1 5                                        | 15Vdc for transmitter        |
| 2 4                                        | 24Vdc, 50mA                  |

(\*) R77 for version with potentiometer input (Rinput > 10MΩ)

Please, contact GEFRA sales people for the codes availability.

GEFRAN spa reserves the right to make any modification of the design or function, at any moment without prior notice

|                                                                                     |                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Conformity C/UL/US File no. E216851                                                                                                                                                                                                                                     |
|   | The instrument conforms to the European Directives 2004/108/CE and 2006/95/CE with reference to the generic standards:<br><b>EN 61000-6-2</b> (immunity in industrial environment) <b>EN 61000-6-3</b> (emission in residential environment) <b>EN 61010-1</b> (safety) |

**GEFRAN**

GEFRAN spa via Sebina, 74 - 25050 Provaglio d'Iseo (BS)  
 Tel. 03098881 - fax 0309839063 - Internet: <http://www.gefran.com>

DTS\_4T48\_0509\_ENG